

# 4-POST LIFTS

## ELECTRO-HYDRAULIC

The electro-hydraulic 4-post lifts of the SM series are available in numerous variants: **SM40-450IMOT4P, SM40-450IMOT4, SM40-450AKPDIMOT4, SM40-450AKPDIMOT4P, SM40-510AKPDIMOT4, SM50-570AKPDIMOT7, SM50-570AKPDIMOT7P.**

+ Versions with flat platforms  
+ Wheel alignment versions  
+ Versions with wheel free lift for wheel alignment

The hydraulic cylinder is located inside the fixed platform and is thus perfectly protected.

High-resistant, galvanised and pre-stretched metal cables.

Large-diameter pulleys with self-lubricating and maintenance-free bushes.

Automatic mechanical back-up safety devices (every 100 mm) with pneumatic release allowing stationary operation with unladen cables.

Automatic anti-toe trap alarm during final stages of lift descent.

Low-friction rear slip plates. They can be manually locked in the central position. Transverse and angular movements in both directions.



Mechanical, electrical and hydraulic safety devices in compliance with the prevailing standard for CE marking.

Low-voltage (24V) electrical system with control circuit.


Immediate-triggering safety stud devices in case a cable slackens or fails.




Model	Capacity	Motor	Article number
SM40-450IMOT4P	4000 kg	2,6 kW	SM40-450IMOT4P
SM40-450IMOT4	4000 kg	2,6 kW	SM40-450IMOT4
SM40-450KPDIMOT4	4000 kg	2,6 kW	SM40-450KPDIMOT4
SM40-450KPDIMOT4P	4000 kg	2,6 kW	SM40-450KPDIMOT4P
SM40-510AKPDIMOT4	4000 kg	2,6 kW	SM40-510AKPDIMOT4
SM50-570AKPDIMOT7	5000 kg	2,6 kW	SM50-570AKPDIMOT7
SM50-570AKPDIMOT7P	5000 kg	2,6 kW	SM50-570AKPDIMOT7P

# SPECIFICATIONS


SM40-450IMOT4

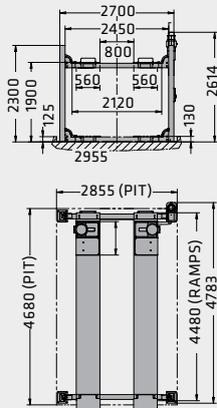


SM40-450IMOT4-P

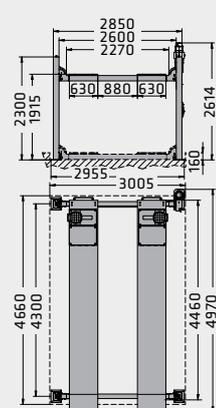


SM50-570AKPD-IMOT7

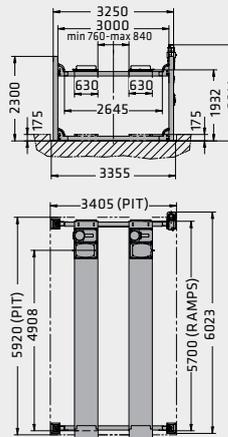


SM50-570AKPD-IMOT7-P

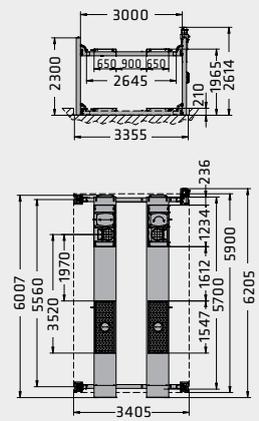


SM40-450AKPD-IMOT4

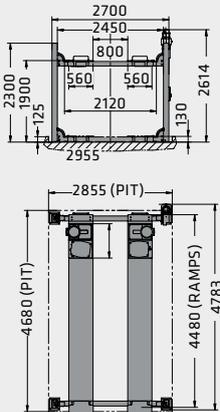

SM40-450AKPD-IMOT4-P

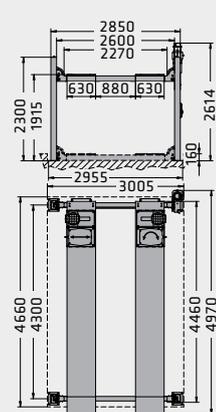

SM40-510AKPD-IMOT4

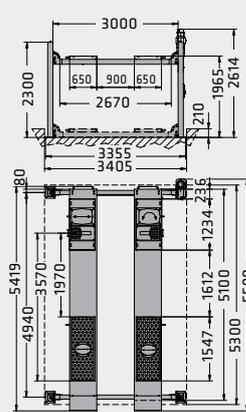

Technical changes reserved. Data are considered advertisement.

